



Repubblica di San Marino
Autorità per l'Omologazione
Republic of San Marino
Authority for Homologation

Via Consiglio dei Sessanta, 99
47891 Dogana - Repubblica di San Marino

Comunicazione
Communication

	Concernente ^{2/} Concerning ^{2/}	Il rilascio dell'omologazione Approval granted ~~L'estensione dell'omologazione~~ ~~Approval extended~~ ~~Il rifiuto dell'omologazione~~ ~~Approval refused~~ ~~La revoca dell'omologazione~~ ~~Approval withdrawn~~ ~~La cessazione definitiva della produzione~~ ~~Production definitively discontinued~~
--	---	--

of a type of ~~electrical~~/electronic sub-assembly ⁽²⁾ with regard to Regulation no. 10.

Omologazione N. Approval No.	E57*10R06/03*1476	Estensione N. Extension No.	00
---	--------------------------	--	-----------

Marchio di omologazione Approval mark	 10R-06 1476
--	--

1. Make (trade name of manufacturer): DXZ DUOXINGZHE
2. Type and general commercial description(s):
Type : H-F-16
General commercial description:
LED Work Light
3. Means of identification of type, if marked on the
~~vehicle/component/separate technical unit~~ ⁽²⁾ Approval mark
- 3.1 Location of that marking: See information document

4. Category of vehicle: N/A
5. Name and address of manufacturer: Guangdong DXZ Lighting Technology Co., Ltd.
No. 15, Hecun Section, Yuechi West Road, Hecun
Community, Lishui Town, Nanhai District, Foshan
City, China
6. In the case of components and separate technical units, location and method of affixing of the approval mark: See information document
7. Address(es) of assembly plant(s): Guangdong DXZ Lighting Technology Co., Ltd.
No. 15, Hecun Section, Yuechi West Road, Hecun
Community, Lishui Town, Nanhai District, Foshan
City, China
8. Additional information (where applicable): See appendix below
9. Technical Service responsible for carrying out the tests: **AUTOMOTIVE TECHNICAL SERVICE S.r.l.**
Via Consiglio dei Sessanta, 99
47891-DOGANA - Repubblica di San Marino
10. Date of test report: 04/06/2025
11. No. of test report: ATS-SM-IR-10-22587
12. Remarks (if any): See appendix below
13. Place: Dogana – Repubblica di San Marino
14. Date: 25/06/2025
15. Signature:




Ing. Marco Conti
Direttore Generale
General Director

16. The index to the information package lodged with the Approval Authority, which may be obtained on request, is attached.
17. Reasons for extension: --

(2) Strike out what does not apply.

**Appendix to type-approval communication form No. E57*10R06/03*1476*00
concerning the type-approval of an ~~electrical~~/electronic sub-assembly
under Regulation No. 10**

1. Additional information:

- 1.1. Electrical system rated voltage: DC 12/24V, negative ground⁽²⁾
- 1.2. This ESA can be used on any vehicle type with the following restrictions: None
- 1.2.1. Installation conditions, if any: None
- 1.3. This ESA can be used only on the following vehicle type: Not Applicable
- 1.3.1. Installation conditions, if any: Not Applicable
- 1.4. The specific test method(s) used and the frequency ranges covered to determine immunity were: (Please specify precise method used from Annex 9): 20-2000MHz
- 1.5. Laboratory accredited to ISO 17025 and recognised by the Approval Authority responsible for carrying out the tests: Guangzhou Shuntai Quality Technical Service Co, Ltd.

2. Remarks: None

(2) *Strike out what does not apply.*

Allegato <i>Enclosure</i>				
Al certificato di omologazione ECE N. <i>To ECE approval certificate No.</i>		E57*10R06/03*1476*00		
Indice del fascicolo di omologazione <i>Index to the information package</i>				
Data <i>Date of issue</i>		25/06/2025	Data ultima modifica <i>Last amendment date</i>	--
1.	Clausole di garanzia e istruzioni sul diritto di presentare ricorso <i>Collateral clauses and instruction on right to appeal</i>			
2.	Rapporto(i) Finale di Ispezione No. <i>Test report(s) No.</i>	ATS-SM-IR-10-22587	Data <i>Date</i>	04/06/2025
3.	Scheda informativa N. <i>Information document No.</i>	H-F-16-00	Data <i>Date</i>	31/03/2025
			Data ultima modifica <i>Last amendment date</i>	--



Clausole di garanzia e istruzioni sul diritto di presentare ricorso

Clausole di garanzia

La produzione in serie deve essere esattamente conforme ai documenti di omologazione. Le variazioni di produzione in serie sono consentite solo con il consenso espresso del **Autorità per l'Omologazione**.

Le variazioni del nome della società, l'indirizzo e lo stabilimento di produzione, nonché una delle parti che hanno l'autorità alla consegna o eventuali rappresentanti nominati al momento del rilascio dell'omologazione, devono essere immediatamente comunicate al **Autorità per l'Omologazione**. La violazione di queste regole può portare al ritiro dell'omologazione ed inoltre può essere legalmente perseguita.

L'omologazione decade se viene restituita o ritirata o se il tipo omologato non è più conforme ai requisiti di legge. La revoca può essere fatta se non esistono più i requisiti richiesti per il rilascio e la continuazione dell'omologazione, se il titolare dell'omologazione viola gli obblighi dettati dall'omologazione, anche nel caso in cui gli obblighi derivino dalle condizioni assegnate all'interno dell'omologazione, o se è accertato che il tipo approvato non è conforme ai requisiti di sicurezza del traffico e di tutela dell'ambiente.

L'**Autorità per l'Omologazione** può verificare la corretta applicazione della delega conferita rilasciata nella presente omologazione, in qualsiasi momento. In particolare, questo include la verifica della produzione, che sia conforme, nonché le misure di controllo di conformità della produzione. Per questo, possono essere presi dei campioni dalla produzione. I dipendenti o rappresentanti dell'**Autorità per l'Omologazione** possono avere accesso senza ostacoli agli impianti di produzione e stoccaggio.

La delega conferita contenuta nella presente omologazione non è trasferibile. I diritti del marchio di terzi non sono interessati da questa omologazione.

Istruzione su diritto di ricorso

Questa omologazione è appellabile entro un mese dalla notifica. Il ricorso deve essere presentato per iscritto o come una domanda inviata all' **Autorità per l'Omologazione** - Via Consiglio dei Sessanta, 99 - 47891 Dogana - Repubblica di San Marino.

Collateral clauses and instruction on right to appeal

Collateral clauses

*The individual production of serial fabrication must be in exact accordance with the approval documents. Changes in the individual production are only allowed with express consent of the **Authority for Homologation**.*

*Changes in the name of the company, the address and the manufacturing plant as well as one of the parties given the authority to delivery or authorized representative named when the approval was granted is to be immediately disclosed to the **Authority for Homologation**. Breach of this regulation can lead to recall of the approval and moreover can be legally prosecuted.*

The approval expires if it is returned or withdrawn or if the type approved no longer complies with the legal requirements. The revocation can be made if the demanded requirements for issuance and the continuance of the approval no longer exist, if the holder of the approval violates the duties involved in the approval, also to the extent that they result from the assigned conditions to this approval, or if it is determined that the approved type does not comply with the requirements of traffic safety or environmental protection.

*The **Authority for Homologation** may check the proper exercise of the conferred authority taken from this approval at any time. In particular this means the compliant production as well as the measures for conformity of production. For this purpose samples can be taken or have taken. The employees or the representatives of the **Authority for Homologation** may get unhindered access to the production and storage facilities.*

The conferred authority contained with issuance of this approval is not transferable. Trade mark rights of third parties are not affected with this approval.

Instruction on right to appeal


*This approval can be appealed within one month after notification. The appeal is to be filed in writing or as a transcript at the **Authority for Homologation** - Via Consiglio dei Sessanta, 99 - 47891 Dogana - Repubblica di San Marino.*

Inspection Report

No. ATS-SM-IR-10-22587

Inspection concerning vehicles / components with regard to:

**Uniform provisions concerning
Electromagnetic Compatibility (EMC)
for M, N, O, L vehicle categories**

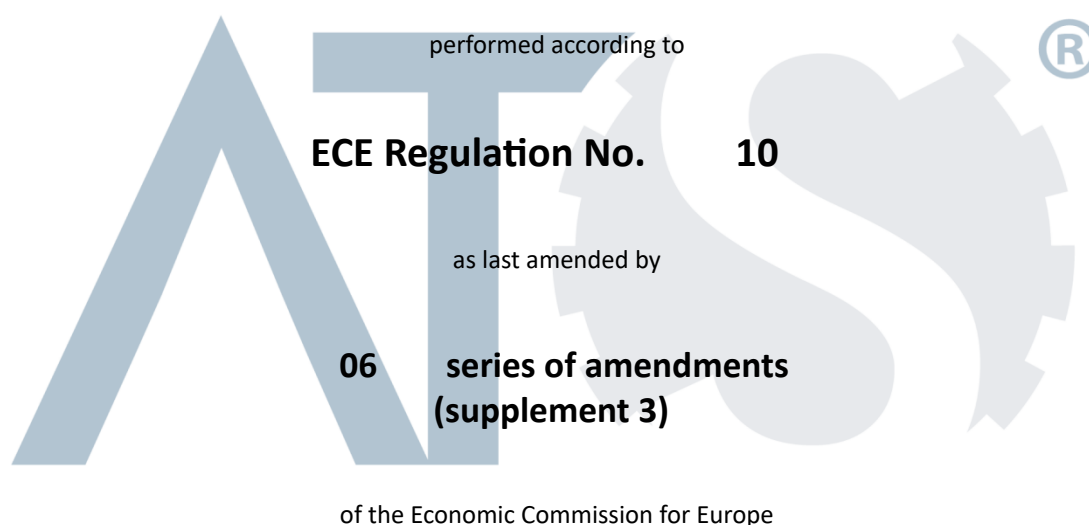

Approval status	
ECE	Number of approval
	E57*10R06/03*1476*00

Of: 04/06/2025

Type: H-F-16

Manufacturer: Guangdong DXZ Lighting Technology Co., Ltd.

0. General information

0.1. Make (trade name of manufacturer): DXZ DUOXINGZHE

0.2. Type: H-F-16

0.2.1. Variant(s): H-Y-14, H-F-9, H-Y-9, 4C-BQ-F, 4C-SQ-F, H-37F-16, H-37Y-19, H-37F-80, H-37F-72, H-37F-40, H-37Y-27, H-F-128, H-F-BS-26, H-Y-4-10LED, H-F-42, H-Y-24, H-F-6K-48, H-F-DRL-16, H-F-DRL-42, H-38F-DRL-35, H-38Y-DRL-34, H-F-16

0.3. Name and address of manufacturer: Guangdong DXZ Lighting Technology Co., Ltd.
No. 15, Hecun Section, Yuechi West Road, Hecun Community, Lishui Town, Nanhai District, Foshan City, China

0.3.1 Name and address of manufacturer's authorized representative: N/A

0.3.2. Production plant(s) address(es): Guangdong DXZ Lighting Technology Co., Ltd.
No. 15, Hecun Section, Yuechi West Road, Hecun Community, Lishui Town, Nanhai District, Foshan City, China

0.4. Information document:
No: H-F-16-00

Date of issue: 31/03/2025

Date of last change: --

0.5. Position of the approval mark: See Drawings of the ESA

0.6. Vehicle category(ies) N/A

(or, if not applicable, vehicle categories which the component(s) is (are) suitable for): M, N, O, L

0.7. Reason(s) for extension of approval N/A

Of: 04/06/2025

Type: H-F-16

Manufacturer: Guangdong DXZ Lighting Technology Co., Ltd.

1. Tested object(s)

1.1 Worst case configuration :
(justification of the determination)

All variants have the same electronic circuit design and the same component list for each PCB, the difference among them are the light color and the LED quantity. Model H-F-16, H-38Y-DRL-34 were tested.

1.2 Description: ~~Vehicle~~ / Object

1.2.1 Make:

DXZ DUOXINGZHE

1.2.2. Manufacturer:

Guangdong DXZ Lighting Technology Co., Ltd.

1.2.3. Type / Variant

Type: H-F-16
Variants: H-38Y-DRL-34

1.2.4. ~~Vehicle VIN number~~ / component identification:

1.2.4.1 Place of marking:

See information document

1.2.5. Main characteristics

See information document

1.3 Remarks

Of: 04/06/2025

Type: H-F-16

Manufacturer: Guangdong DXZ Lighting Technology Co., Ltd.

2. Test records

2.1 Conformity with the information document

SI /
YES

NO

NR /
NA

2.2 Testing conditions

2.2.1 Broadband electromagnetic interference generated by ESAs

2.2.1.1 Method of measurement:

Measured by the method described in Annex 7 of ECE Regulation No. 10.

2.2.1.2 Results:

Conform / ~~Not Conform~~
(Test data see Appendix 2)

2.2.2. Narrowband electromagnetic interference generated by ESAs

2.2.2.1. Method of measurement:

Measured by the method described in Annex 8 of ECE Regulation No. 10.

2.2.2.2. Results:

Conform / ~~Not Conform~~
(Test data see Appendix 2)

2.2.3 Immunity of ESAs to electromagnetic radiation:

2.2.3.1. Method of measurement:

Measured by the method described in Annex 9 of ECE Regulation No. 10.

2.2.3.2. Performance criteria:

ECE Regulation No. 10.

2.2.3.3. Results:

Conform / ~~Not Conform~~
(Test data see Appendix 2)

2.2.4. Immunity of ESAs to transient disturbances

2.2.4.1. Method of measurement:

Measured by the method described in Annex 10 of ECE Regulation No. 10.

2.2.4.2. Results:

Conform / ~~Not Conform~~
(Test data see Appendix 2)

2.2.5. Emission of transient conducted disturbances generated by ESAs

2.2.5.1. Method of measurement:

Measured by the method described in Annex 10 of ECE Regulation No. 10.

2.2.5.2. Results:

Conform / ~~Not Conform~~
(Test data see Annex 2)

2.3 Equipment for measuring and testing:

See Appendix 4



Of: 04/06/2025

Type: H-F-16

Manufacturer: Guangdong DXZ Lighting Technology Co., Ltd.

3. Other information

Place of inspection: GuangZhou ShunTai Quality Technical Service Co., Ltd.
Room 206A, 2F,4# Plant, No.63 Punan Road, Huangpu District.
Guangzhou. China. 510760

Date of inspection: 15/05/2025

	Senior Inspector	Junior Inspector (if applicable)
Technical service representative:	Lily Li	N/A

Manufacturer's representative: N/A

Remarks: None

3.1 Appendix

- | | |
|--------------------------------|--------------------|
| 1. List of modifications | See the Appendix 1 |
| 2. Test Data | See the Appendix 2 |
| 3. Sample Photo(s) | See the Appendix 3 |
| 4. List of main test equipment | See the Appendix 4 |

3.2 Enclosures

Information Folder H-F-16-00
31/03/2025

4. Statement of conformity

The information document as given in paragraph 0.4 and the type described there are in compliance with the test specification mentioned above.

With regard to the required level of performance to be achieved, the tested items were representative for the type to be approved and cover all variants / versions described in the information folder

The tests were carried out in accordance with the relevant requirements of EN ISO/IEC 17025 and EN ISO/IEC 17020 / R10-06 ECE/UN.

The tested object complies / ~~not complies~~ with the prescriptions of the R10-06 ECE/UN.

The inspection report comprises pages 1 to 32.

The test results relates only to the product tested.

I shall not be reproduced except in full, without written approval of the Technical Service.

Dogana, Repubblica di San Marino

04/06/2025

Number of project and protocol	Originality Check (*)	Automotive Technical Service S.r.l. Inspector  (Lily Li)	
	 ATS-SM-PR-22587	Automotive Technical Service S.r.l. Deputy Technical Director  (Eng. Bogdan Nicolae Domnescu)	

(*) To check the originality of documents, scan the QR Code or connect to the site
<https://www.ats.sm/originality-control-atp-adr-tyapp/> and follow the instruction in it.

Appendix 1

List of modifications

Applicable/ Not Applicable

Appendix 1

More details for application of

Date :-

Correction of : -

Modification of : -

Addition of : -

Deletion of : -



Appendix 2

Test data

Applicable / -Not Applicable

Appendix 2

1 Test object(s)

1.1. Commercial description: LED work light

1.2. Type: H-F-16

1.2.1. Variants: H-F-16, H-38Y-DRL-34

1.3. Technical data of the tested ESA type See information document

1.3.1. Electrical system rated voltage: 12/24 V

1.3.2. This ESA can be used on any vehicle type with the following restrictions: N/A

1.3.3. Installation conditions: N/A

1.3.4. This ESA can be used on the following vehicle types: N/A

1.3.5. Installation conditions N/A

Test results**1. Broadband / narrowband electromagnetic interference generated by ESAs**


Radiated broadband electromagnetic Emissions : as shown in table 1

Radiated narrow band electromagnetic Emissions : as shown in table 2

Antenna position : horizontal and vertical


Rated voltage : DC 12 V/ 24V

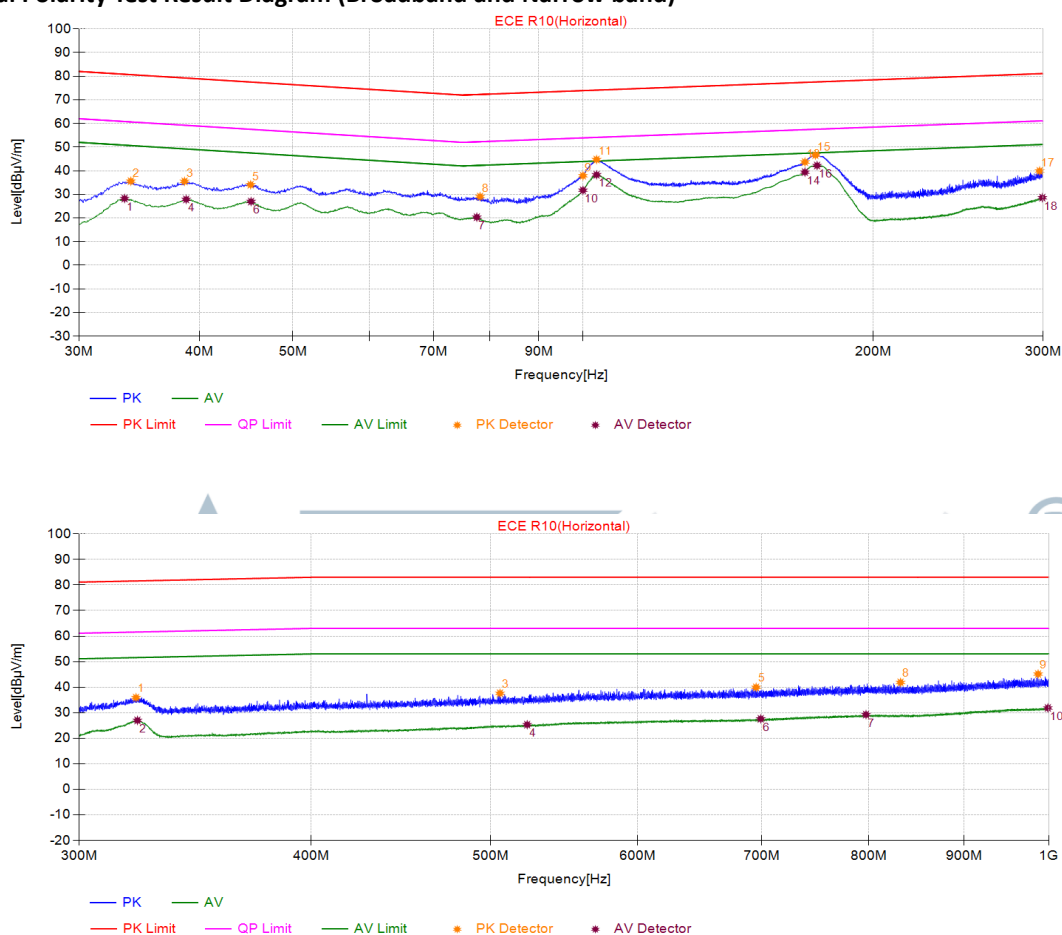


Model H-F-16**12V****Horizontal Polarity Test Result Diagram (Broadband and Narrow band)**

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.


Vertical Polarity Test Result Diagram (Broadband and Narrow band)

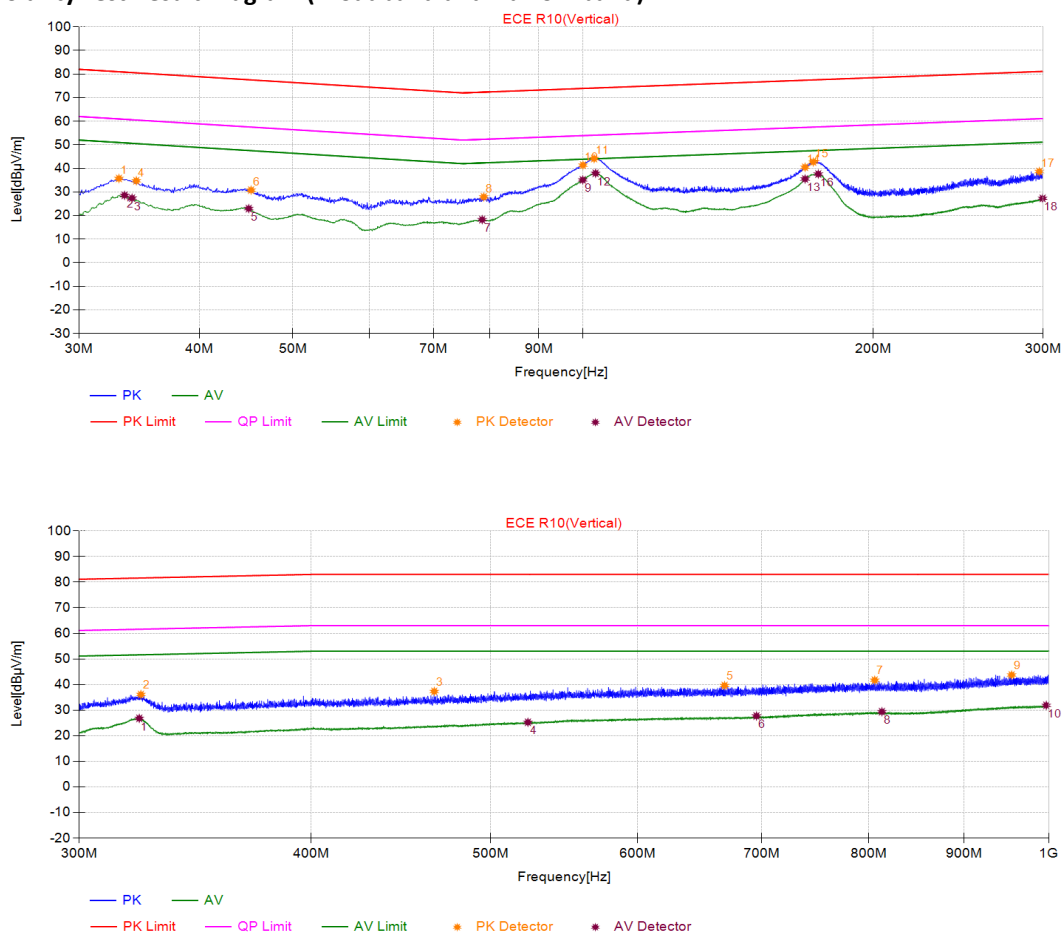


The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.

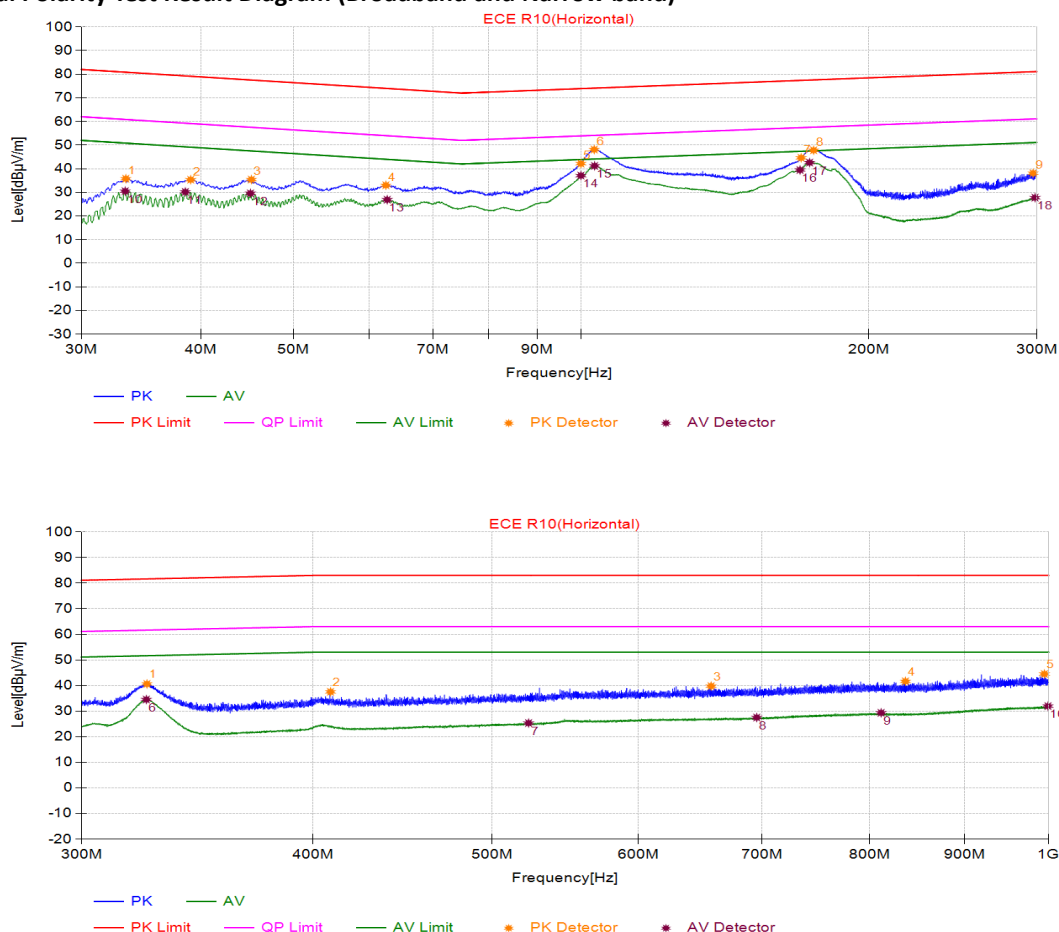24V**Horizontal Polarity Test Result Diagram (Broadband and Narrow band)**

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.

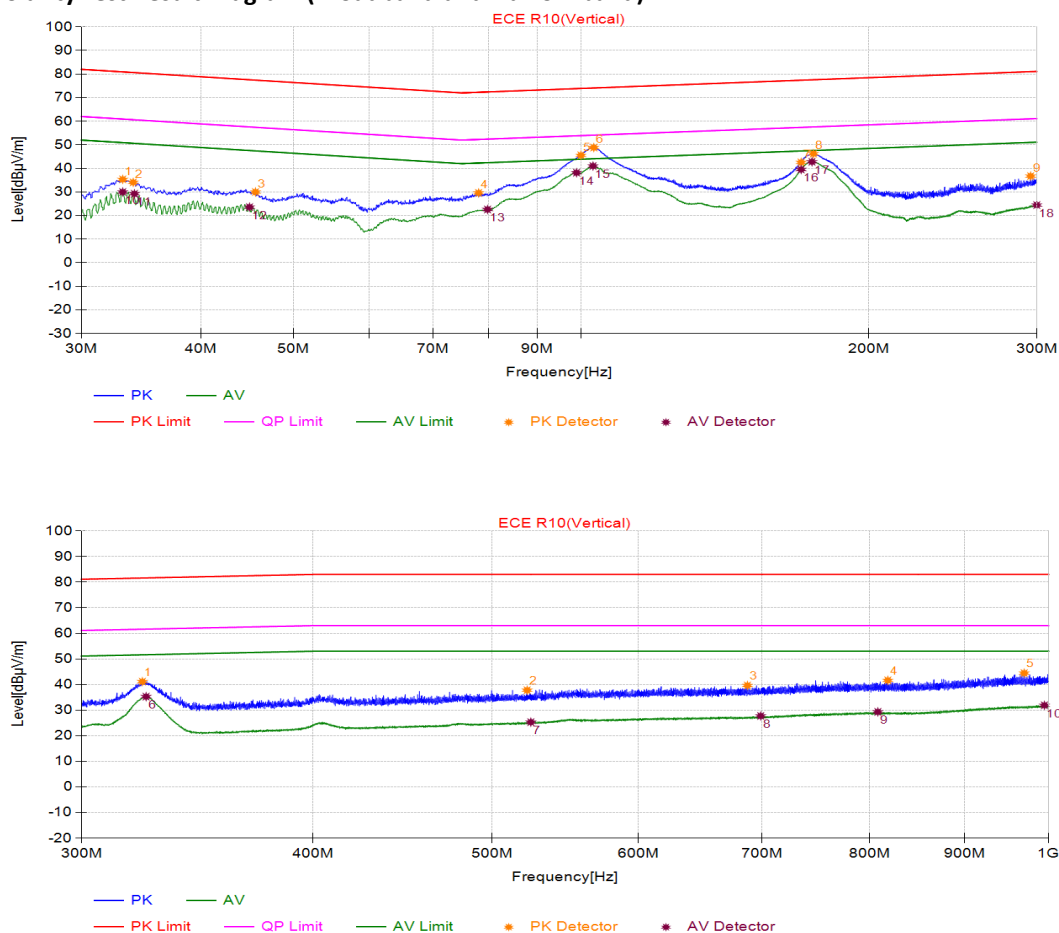
Vertical Polarity Test Result Diagram (Broadband and Narrow band)

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.

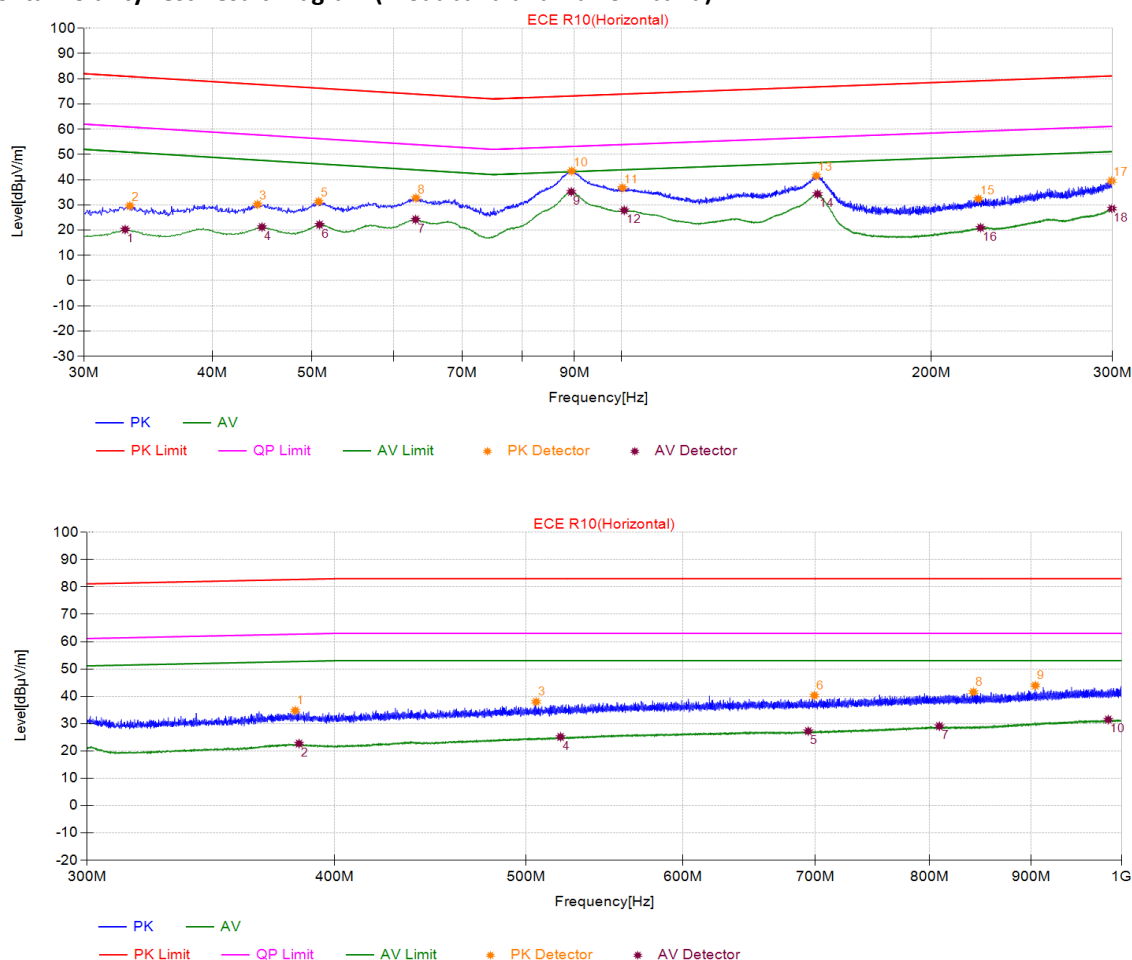Model H-38Y-DRL-34**12V****Horizontal Polarity Test Result Diagram (Broadband and Narrow band)**

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.


Vertical Polarity Test Result Diagram (Broadband and Narrow band)

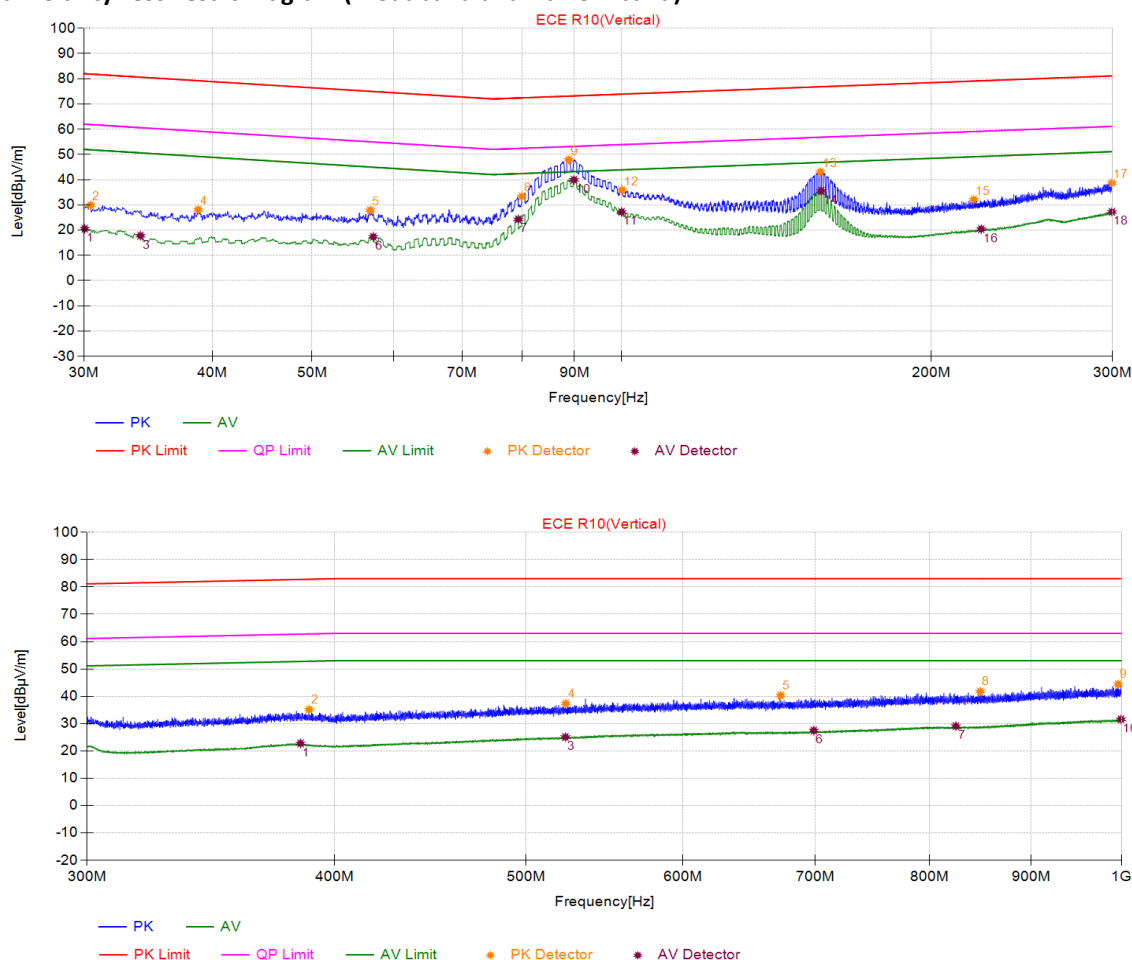

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.


24V

Horizontal Polarity Test Result Diagram (Broadband and Narrow band)

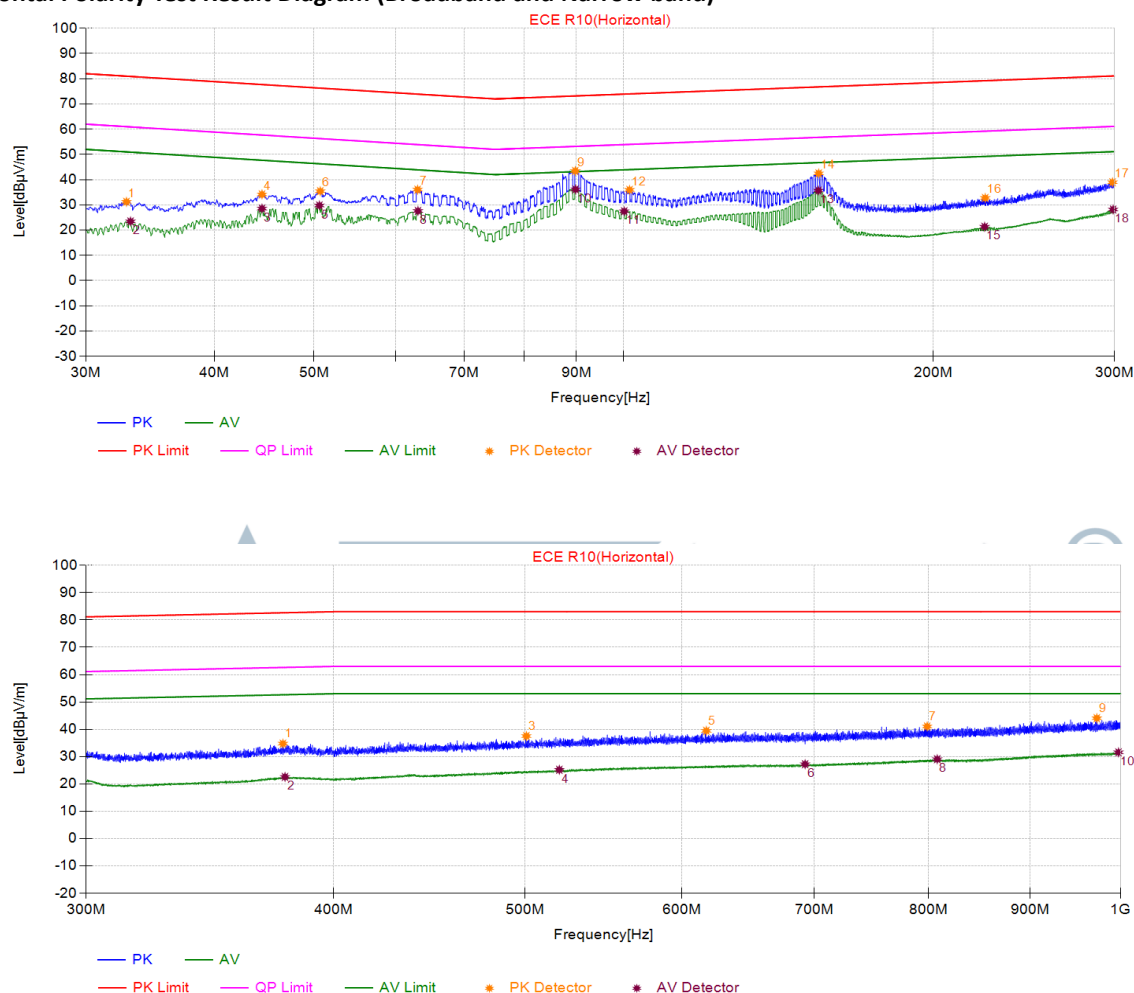

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.

Vertical Polarity Test Result Diagram (Broadband and Narrow band)

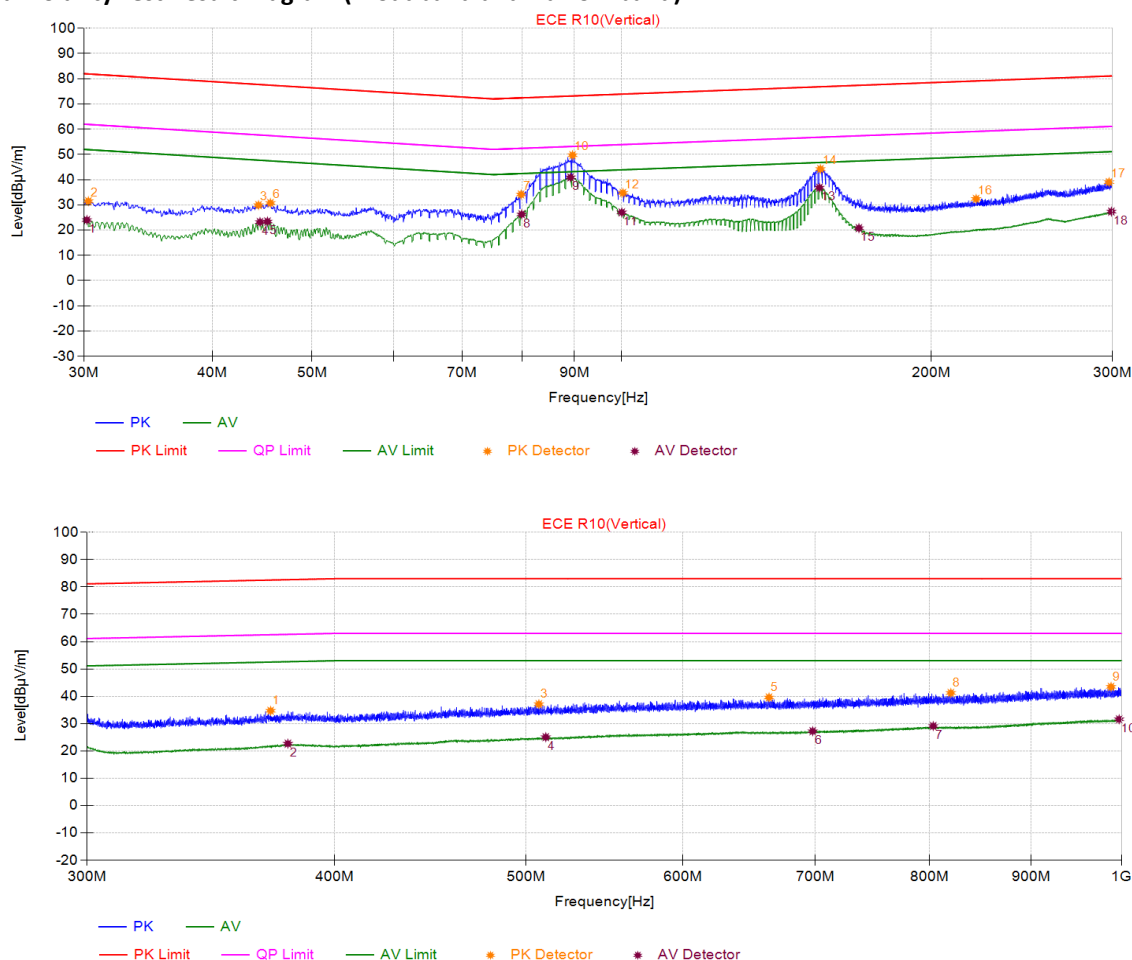

The ESA is deemed to conform to the requirements in respect of this frequency band according to 6.5.2.2 and 6.6.2.2. of Regulation 10.06/ECE.

2. Immunity of ESAs to electromagnetic radiation

Test method : ISO 11452-2:2004; ISO 11452-4:2005

Measurement result:

Model H-F-16, H-38Y-DRL-34**12V systems**

Frequency range (MHz)	Test level	Type of modulation	Test distance	Antenna position	Result
20-400	60mA	AM	150mm	/	Pass*
400-800	30V/m	AM	1000mm	Vertical	Pass*
800-2000	30V/m	PM	1000mm	Vertical	Pass*

Remark:

* no degradation of performance of 'immunity-related functions.

Model H-F-16, H-38Y-DRL-34**24V systems**

Frequency range (MHz)	Test level	Type of modulation	Test distance	Antenna position	Result
20-400	60mA	AM	150mm	/	Pass*
400-800	30V/m	AM	1000mm	Vertical	Pass*
800-2000	30V/m	PM	1000mm	Vertical	Pass*

Remark:

* no degradation of performance of 'immunity-related functions.

3. Immunity of ESAs to transient disturbances

Test method : ISO 7637-2 : 2004

Measurement result:

Model H-F-16, H-38Y-DRL-34

12V systems

Test pulse	Test level	Number of pulse / test time	Burst cycle / pulse Repetition time	Required minimum function status *	Status of function true value (mode 1)	Result
1	-75V	5000pulse	0.5s	C	C	Pass
2a	+37 V	5000pulse	0.2s	B	A	Pass
2b	+10 V	10pulse	0.5s	C	C	Pass
3a	-112V	1h	90ms	A	A	Pass
3b	+75 V	1h	90ms	A	A	Pass
4	-6V	1pulse	/	B (for ESA which must be operational during engine start phases) C (for other ESA)	C	Pass

Model H-F-16, H-38Y-DRL-34

24V systems

Test pulse	Test level	Number of pulse / test time	Burst cycle / pulse Repetition time	Required minimum function status *	Status of function true value (mode 1)	Result
1	-450 V	5000pulse	0.5s	C	C	Pass
2a	+37 V	5000pulse	0.2s	B	A	Pass
2b	+20 V	10pulse	0.5s	C	C	Pass
3a	-150 V	1h	90ms	A	A	Pass
3b	+150 V	1h	90ms	A	A	Pass
4	-12 V	1h	/	B (for ESA which must be operational during engine start phases) C (for other ESA)	A	Pass

Remark:

** Class A: all functions of a device/system perform as designed during and after exposure to disturbance.*

Class B: all functions of a device/system perform as designed during exposure. However, one or more of them can go beyond specified tolerance. All functions return automatically to within normal limits after exposure is removed. Memory functions shall remain class A.

Class C: one or more functions of a device/system do not perform as designed during exposure but return automatically to normal operation after exposure is removed.

Class D: one or more functions of a device/system do not perform as designed during exposure and do not return to normal operation until exposure is removed and the device/system is reset by simple "operator/use" action.

Class E: one or more functions of a device/system do not perform as designed during and after exposure and cannot be returned to proper operation without repairing or replacing the device/system.



Test data

Appendix 2

4. Emission of transient conducted disturbances generated by ESAs

Test method : ISO 7637-2: 2004

Model H-F-16

Polarity of pulse amplitude	Maximum allowed value for vehicles with 12V systems	Measured Pulse amplitude True Value(Fast)	Measured Pulse amplitude True Value(Slow)
Positive	+75V	0.0V	+0.7V
Negative	-100V	0.0V	0.0V

Polarity of pulse amplitude	Maximum allowed value for vehicles with 24V systems	Measured Pulse amplitude True Value(Fast)	Measured Pulse amplitude True Value(Slow)
Positive	+150V	+2.8V	+1.6V
Negative	-450V	0.0V	0.0V

Model H-38Y-DRL-34

Polarity of pulse amplitude	Maximum allowed value for vehicles with 12V systems	Measured Pulse amplitude True Value(Fast)	Measured Pulse amplitude True Value(Slow)
Positive	+75V	0.0V	+0.6V
Negative	-100V	0.0V	0.0V

Polarity of pulse amplitude	Maximum allowed value for vehicles with 24V systems	Measured Pulse amplitude True Value(Fast)	Measured Pulse amplitude True Value(Slow)
Positive	+150V	+1.6V	+1.2V
Negative	-450V	0.0V	0.0V


Test data

Appendix 2


Model H-F-16

12V systems


Slow Pulse: OFF-->ON Data Graph

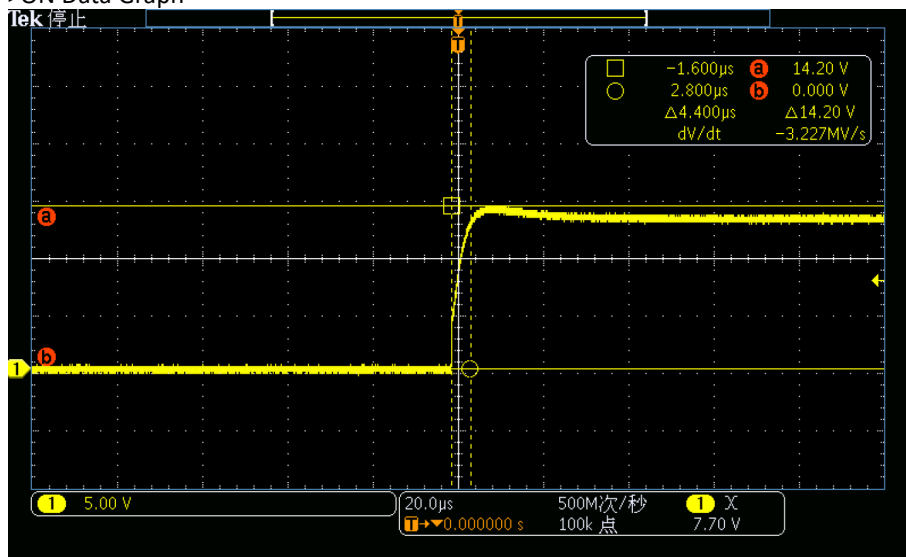


Slow Pulse: ON-->OFF Data Graph

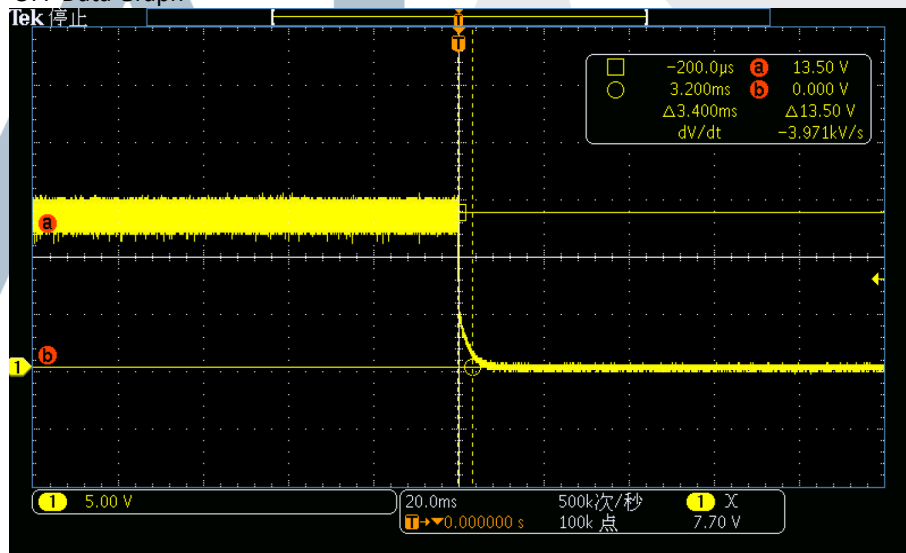

Fast Pulse: OFF-->ON Data Graph

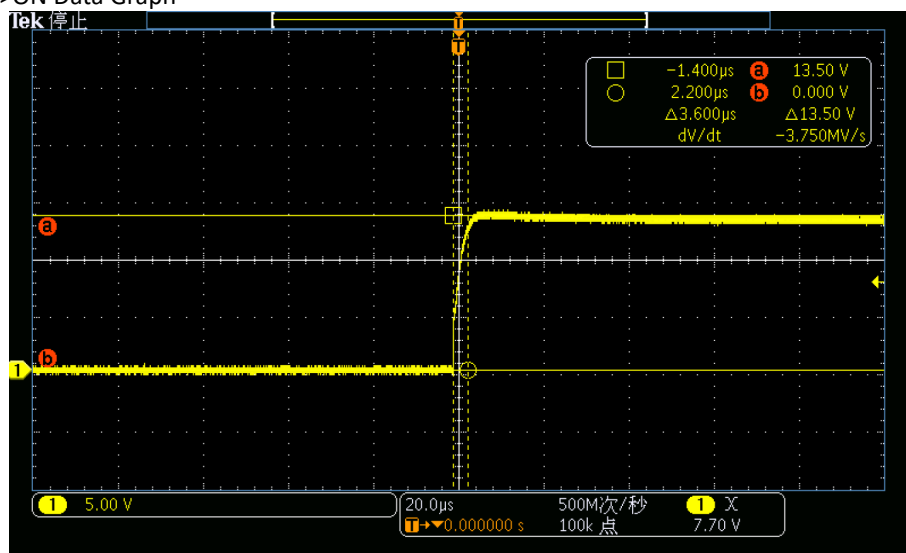


Fast Pulse: ON-->OFF Data Graph

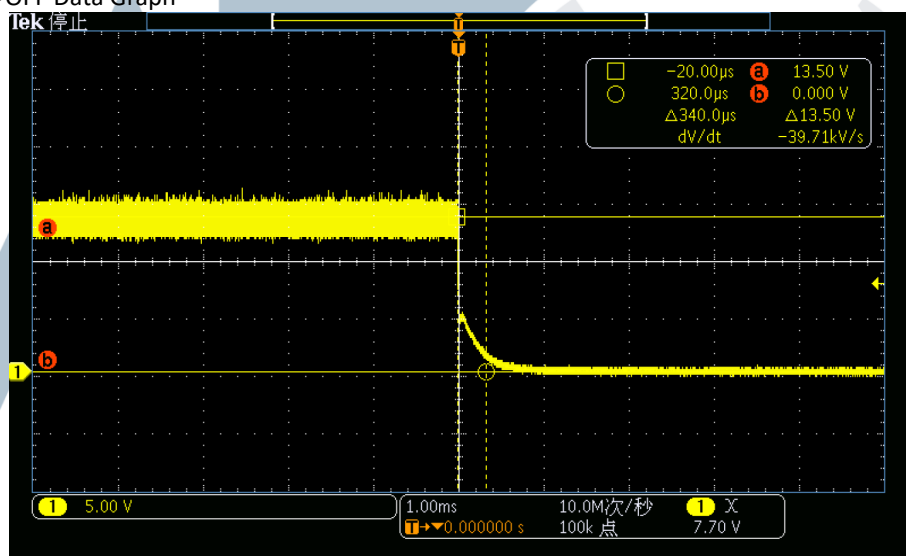


24V systems


Slow Pulse: OFF-->ON Data Graph

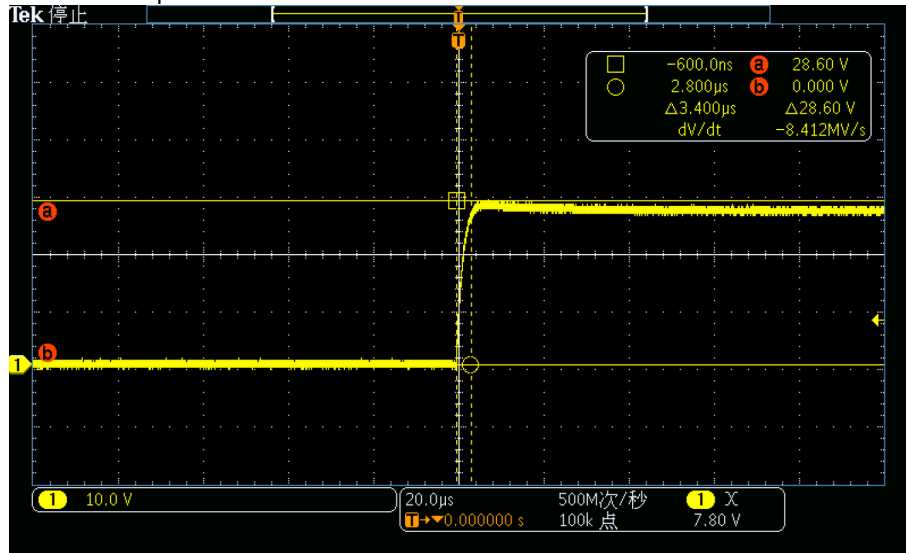


Slow Pulse: ON-->OFF Data Graph

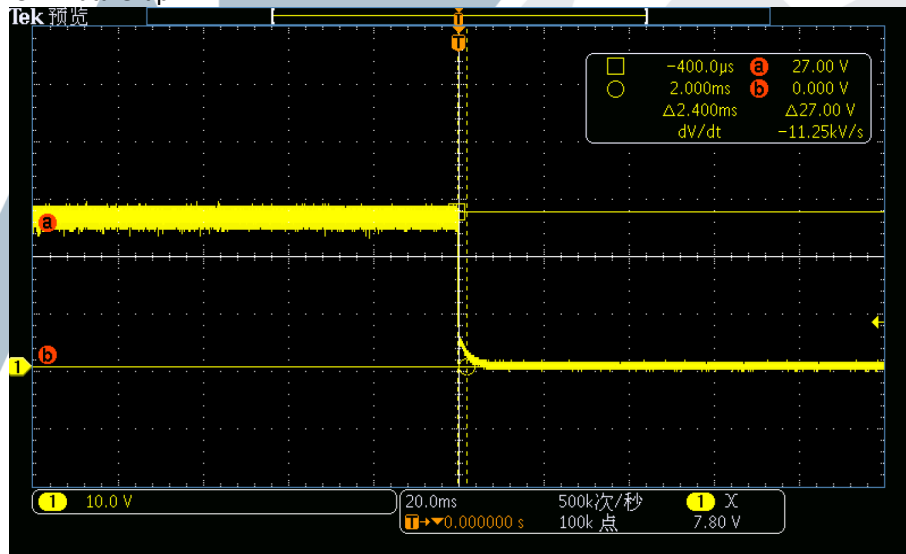

Fast Pulse: OFF-->ON Data Graph

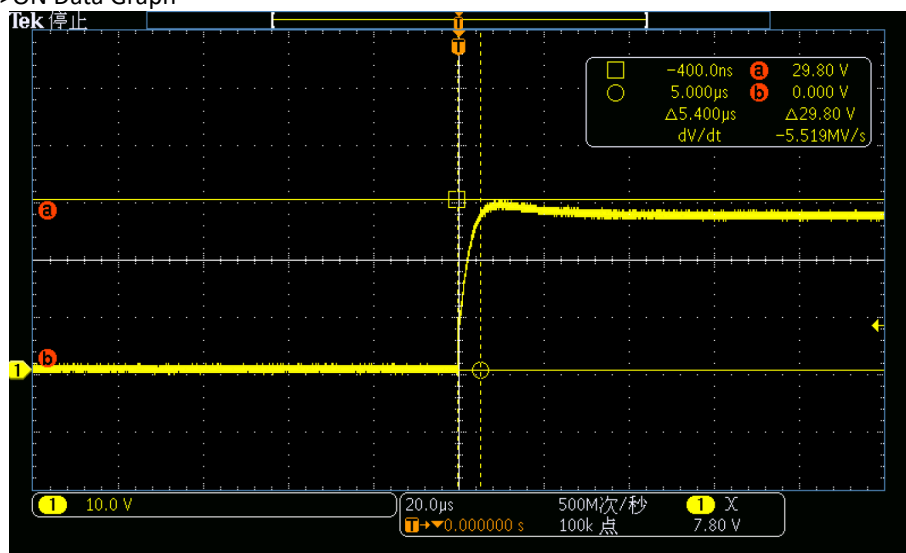


Fast Pulse: ON-->OFF Data Graph

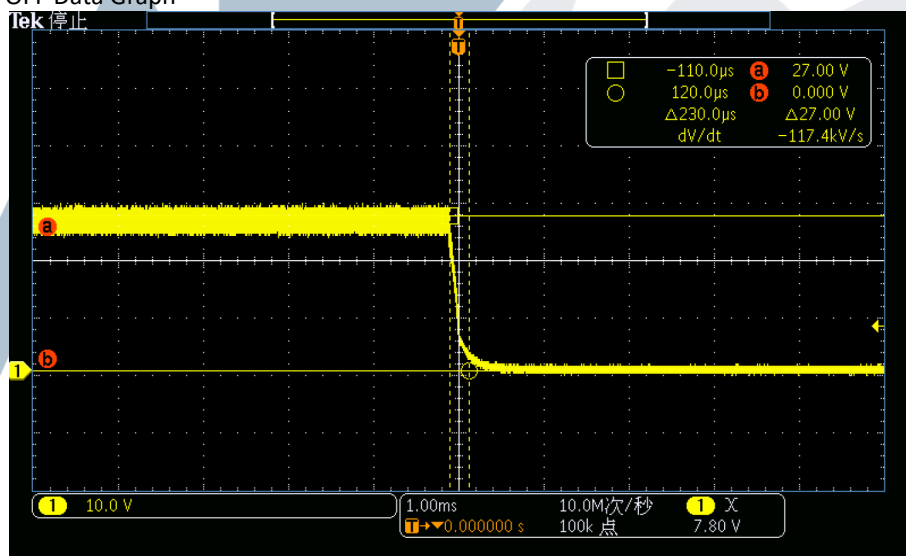


Model H-38Y-DRL-34**12V systems**


Slow Pulse: OFF-->ON Data Graph

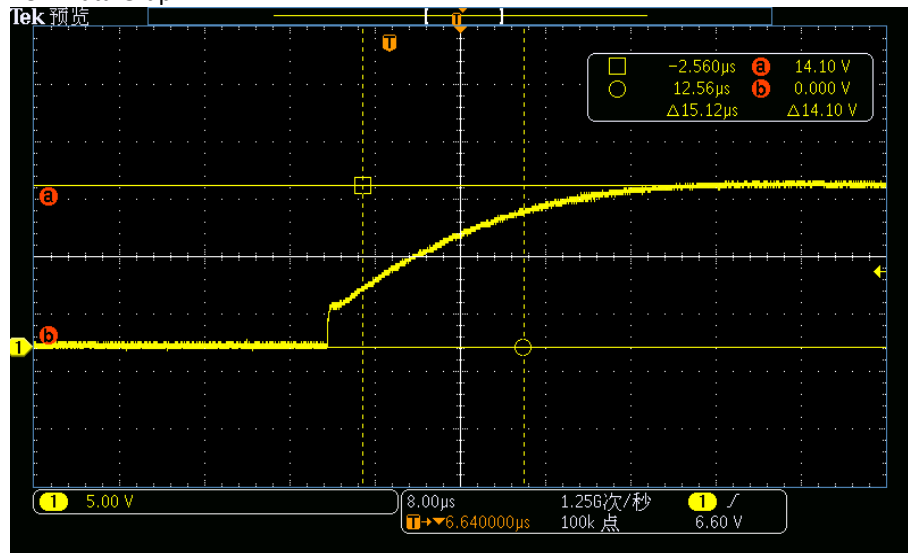


Slow Pulse: ON-->OFF Data Graph

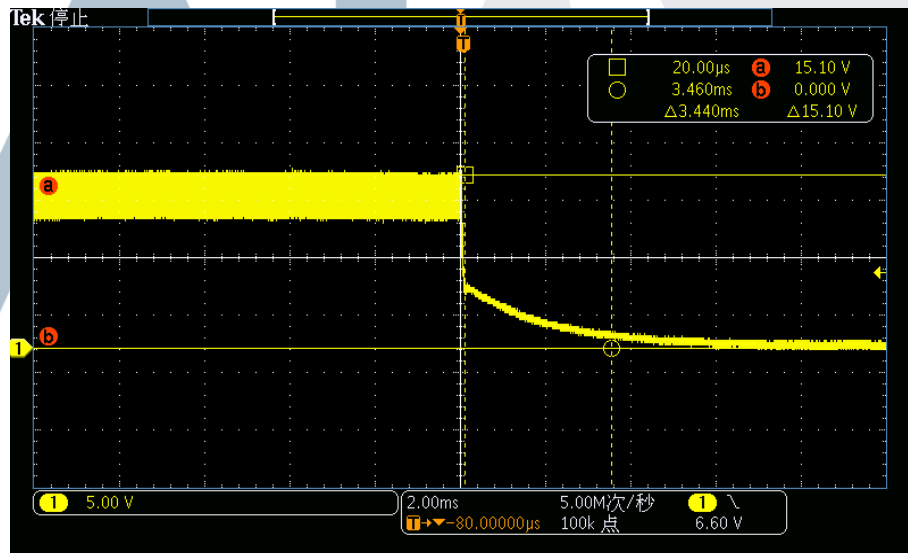

Fast Pulse: OFF-->ON Data Graph

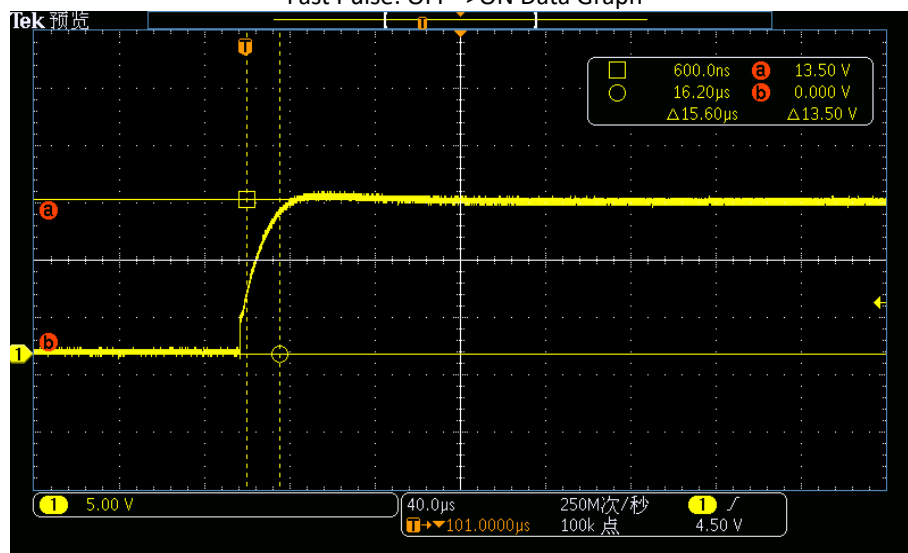


Fast Pulse: ON-->OFF Data Graph

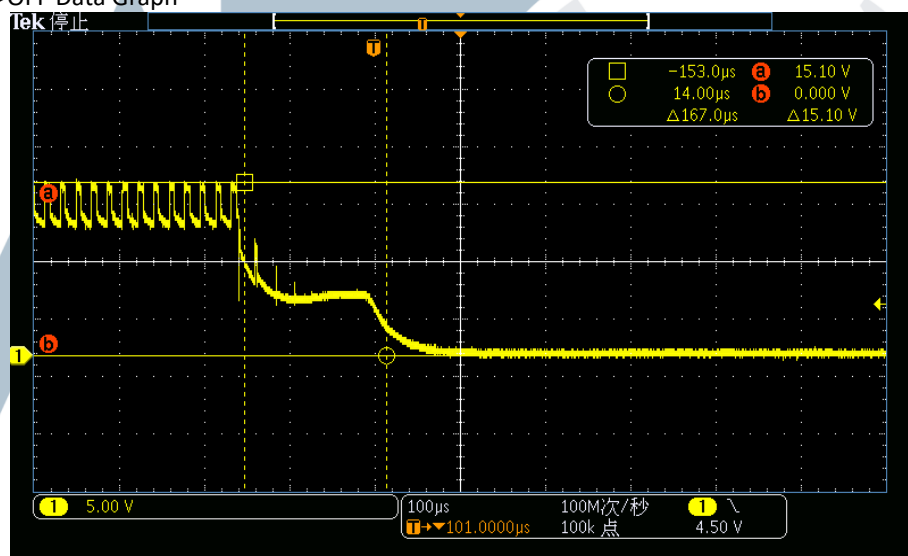


24V systems


Slow Pulse: OFF-->ON Data Graph

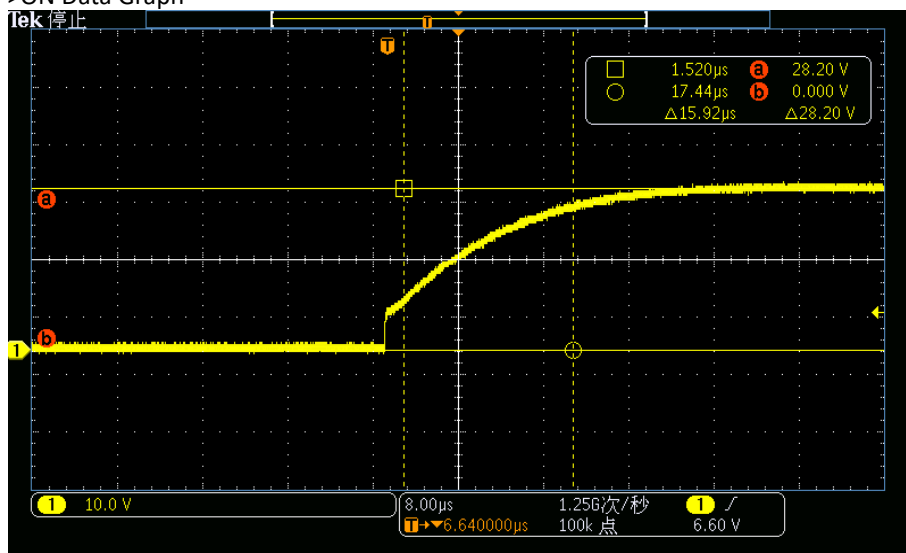


Slow Pulse: ON-->OFF Data Graph

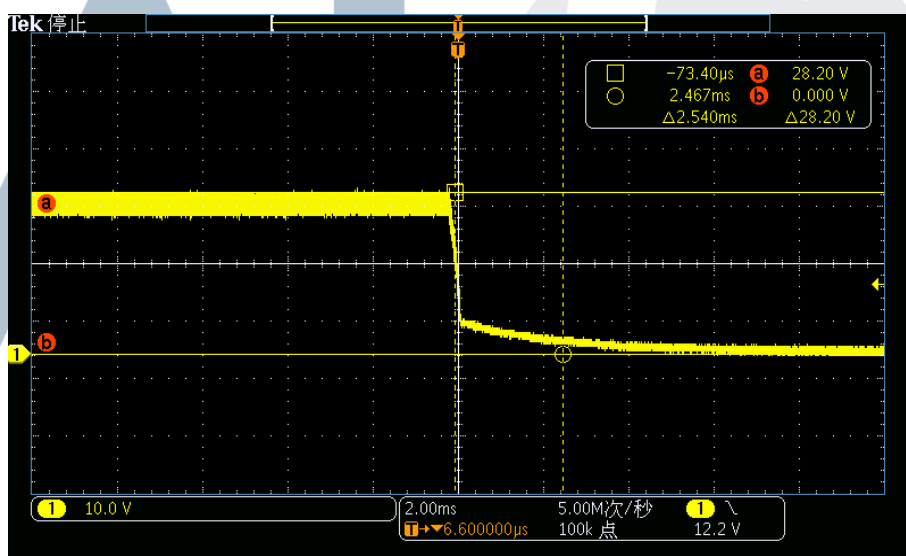

Fast Pulse: OFF-->ON Data Graph

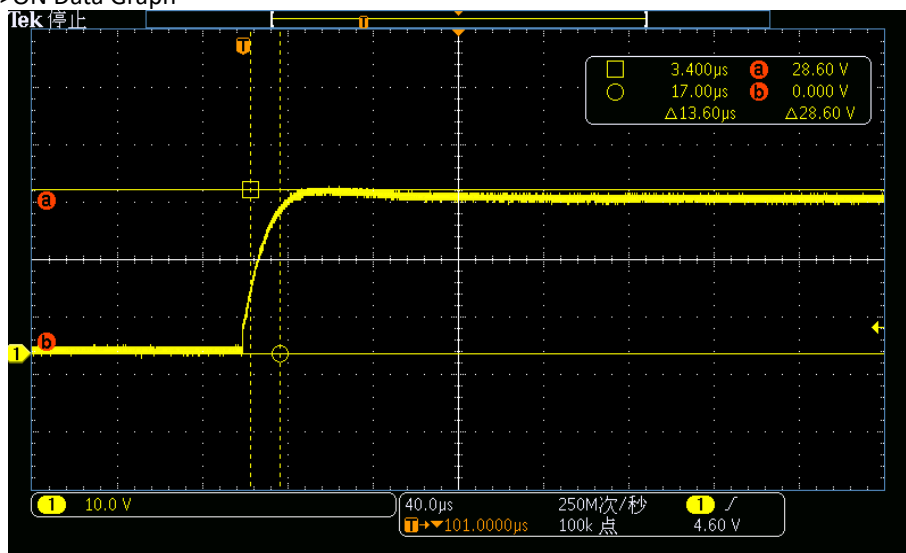

Fast Pulse: ON-->OFF Data Graph

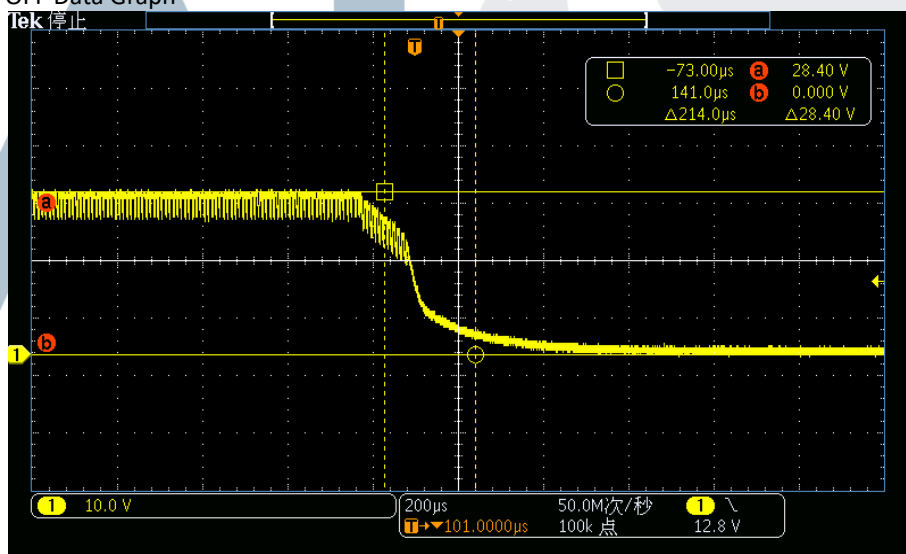

Appendix 3

Sample photos

Applicable / ~~Not Applicable~~

Appendix 3



Appendix 4

List of main equipment

Applicable / ~~Not Applicable~~

Appendix 4

Equipment	Serial / Certificate No.	Calibration due*
ALSE ROOM	CN J202206020680B-0006	20/07/2025
Injection probe	CN J202406171781A-0015	21/06/2025
L.I.S.N.	CN J202406171781A-0012	21/06/2025
L.I.S.N.	CN J202406171781A-0014	21/06/2025
Biconical antenna	CN 1GA23062713337-0068	05/07/2025
Log-periodic antenna	CN 1GA240719117044-0022	08/08/2025
Supply Voltage Change Simulator	CN J202406171781A-0001	21/06/2025
Load dump wave simulator	CN J202406171781A-0002	21/06/2025
Transient pulse disturbance simulator	CN J202406171781A-0003	21/06/2025
Scanning receiver	CN J202406171781A-0021	21/06/2025
Digital phosphor oscilloscope	CN J202406171781A-0004	21/06/2025


All the instruments have been calibrated and are in the period of validity.

**Information document no. H-F-16-00 relating to type-approval of an electronic subassembly with respect to electromagnetic compatibility
(ECE Regulation 10.06 to Supplement 3)**

Type : H-F-16

Manufacturer : Guangdong DXZ Lighting Technology Co., Ltd.

Authorized person: :



Date : 31/03/2025

INDEX

2	Index
3	General
5	Drawings of the ESA
10	Electronic block diagram
11	List of components constituting the ESA

GENERAL

1. Make (trade name of manufacturer):
DXZ DUOXINGZHE

2. Type: **H-F-16**
Type H-F-16 has variants as below:

H-Y-14, H-F-9, H-Y-9, 4C-BQ-F, 4C-SQ-F, H-37F-16, H-37Y-19, H-37F-80, H-37F-72, H-37F-40, H-37Y-27, H-F-128, H-F-BS-26, H-Y-4-10LED, H-F-42, H-Y-24, H-F-6K-48, H-F-DRL-16, H-F-DRL-42, H-38F-DRL-35, H-38Y-DRL-34, H-F-16

Above variants have the same electronic circuit design and the same component list for each PCB, the difference among them are the light color and the LED quantity.

General commercial description(s):
LED Work Light

3. Means of identification of type, if marked on the component/separate technical unit ⁽¹⁾:
Approval mark

3.1 Location of that marking:
Stuck on the enclosure, See Drawings of the ESA

4. Name and address of manufacturer:
**Guangdong DXZ Lighting Technology Co., Ltd.
No. 15, Hecun Section, Yuechi West Road, Hecun Community, Lishui Town, Nanhai District, Foshan City, China**

Name and address of authorised representative, if any:**N/A**

5. In the case of components and separate technical units, location and method of affixing of the approval mark:
Stuck on the enclosure, See Drawings of the ESA.

6. Address(es) of assembly plant(s):
**Guangdong DXZ Lighting Technology Co., Ltd.
No. 15, Hecun Section, Yuechi West Road, Hecun Community, Lishui Town, Nanhai District, Foshan City, China**

7. This ESA shall be approved as a component/STU².

8. Any restrictions of use and conditions for fitting:
N/A

9. Electrical system rated voltage:
DC12-24V, negative ground.

Appendix 1: Description of the ESA chosen to represent the type (electronic block diagram and list of main component constituting the ESA (e.g. make and type of microprocessor, crystal, etc.).

See electronic block diagram and list of main component constituting the ESA for details.

Appendix 2: Relevant test report(s) supplied by the manufacturer from a test laboratory accredited to ISO 17025 and recognized by the Type Approval Authority for the purpose of drawing up the type approval certificate.

N/A

Only applicable for charging systems: **N/A**

10. Charger:
N/A

11. Charging current:
N/A

12. Maximal nominal current (in each mode if necessary) :
N/A


13. Nominal charging voltage:
N/A

14. Basic ESA interface functions:
N/A

15. Minimum R_{sce} value (see paragraph 7.11. of this Regulation):
N/A

Drawings of the ESA

Location of the ECE approval mark

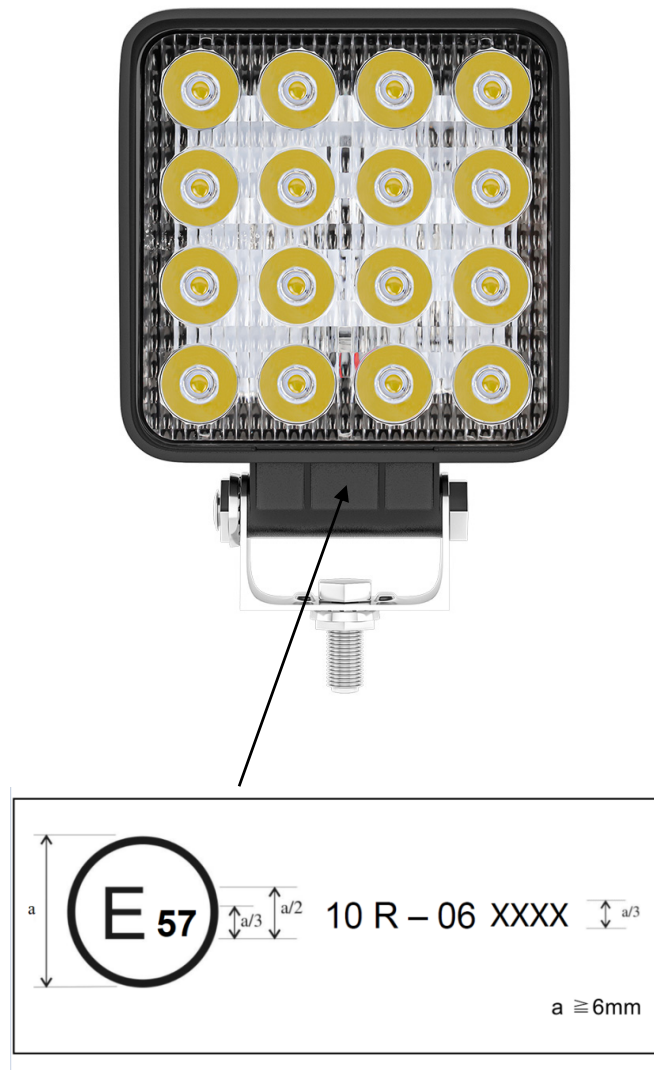

Model name	Description
H-Y-14	
H-Y-9	
H-F-9	
4C-BQ-F	
4C-SQ-F	
H-37F-16	
H-37Y-19	


H-37F-80	
H-37F-72	
H-37F-40	
H-37Y-27	
H-F-128	
H-F-BS-26	
H-Y-4-10LED	

H-F-42	
H-Y-24	
H-F-6K-48	
H-F-DRL-16	
H-F-DRL-42	
H-38F-DRL-35	
H-38Y-DRL-34	

Information document No. : H-F-16-00
Manufacturer : Guangdong DXZ Lighting Technology Co., Ltd.
Regulation : R10.06 to Supplement 3

H-F-16	
--------	---

Electronic Block Diagram

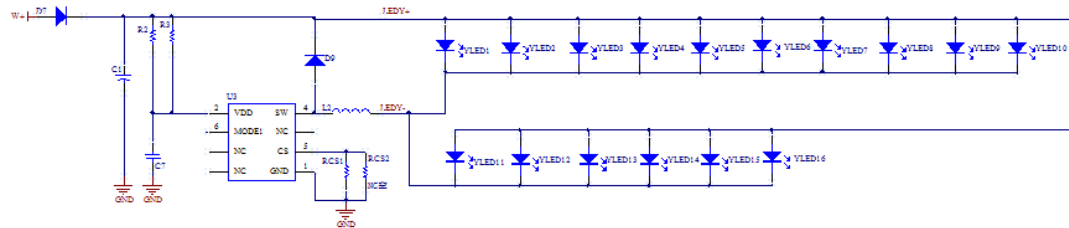

Information document No. : H-F-16-00
Manufacturer : Guangdong DXZ Lighting Technology Co., Ltd.
Regulation : R10.06 to Supplement 3

List of main component constituting the ESA

Name	Specification	Qty.
SMD Resistor	1206 6.2K 5%	1
SMD Resistor	1206 0.13R 5%	2
SMD Capacitor	0805 X7R 1UF/25V	2
SMD electrolytic capacitor	100V/4.7U 6*5	3
Diode SMD	SMA SS210	1
Diode SMD	SMA SS210	1
Chip inductors	CD75 47UH	1
IC	IC LN2656SFC/915 SOP-8	1
3030	3030	16